

The Process of Xylanase Production from *Bacillus pumilus* RXAIII-5

NUR RICHANA^{1*}, TUN TEDJA IRAWADI¹, M. ANWAR NUR¹,
ILLAH SAILAH², AND KHASWAR SYAMSU²

¹Department of Chemistry, Faculty of Mathematics and Natural Sciences

²Department of Agroindustrial Technology, Faculty of Agroindustrial Technology
Institut Pertanian Bogor, Darmaga Campus, Bogor 16680, Indonesia

The optimum conditions for the growth of *Bacillus pumilus* RXAIII-5 (a potential xylanase producer) were sought, these included temperature, pH, aeration, and agitation of the culture batch. Afterwards a mathematical model based on the parameter of cultivation kinetics was formulated. At the same time, the rheology of the fluid used for bacterial cultivation in a bioreactor was studied. The data obtained was used for estimating the 'scaling up' of enzyme production. The results of the study indicate that the optimum condition for processing in 50 ml Erlenmeyer flask are used temperature of 35 °C (308°K), pH 7, and an agitation rate of 140 rpm. The highest xylanase activity and its specific activity are 297.132 U.ml⁻¹ and 655.32 U.g⁻¹protein, respectively. Subsequent experiments in a bioreactor using all of the experiment parameters mentioned above, except for the agitation rate, shows that the results are as follows. The highest specific growth was at 0.082 hour⁻¹ at an aeration and agitation rate of 0.5 vvm and 150 rpm, respectively. Based on the data of the cultivation kinetics, the optimum conditions for the fermentation in Biostat 2L-bioreactor is 1 vvm and 200 rpm of aeration and agitation, respectively. The efficiency of substrate ($Y_{p/s}$) and of cell biomass ($Y_{p/x}$) to produce xylanase is 50.744 U.g⁻¹ and 43.906 U.g⁻¹, respectively. The efficiency of substrate to cell production ($Y_{x/s}$) is 1.178g.g⁻¹. The liquid cultivation-medium has non-Newtonian properties. Based on a mathematical model it is found that the consistency index (k constant) and index of liquid behavior (n value) are 0.179 g.cm⁻¹.second⁻¹ and 0.3212, respectively. Because the value of $0 < n < 1$ and the constant $k > 0$, the culture liquid is categorized as pseudo plastic one. The Rheynold number (NRe) is 6.9×10^3 which indicates it has turbulent characteristics. From a calculation it is found that the power required to run a suitably sized impeller is 0.228 HP (Horse Power) and the power consumption per unit volume is 0.2265 HP.m⁻³. All these values were used for scaling up xylanase production in the bioreactor.

Key words: *Bacillus pumilus*, xylanase, production

Xylanase is a group of extracellular enzymes which are able to hydrolyze hemicelulosic materials into xylose and xylo-oligosaccharides. Xylanases show great potential for industrial applications mainly for the bioconversion of lignocelluloses to sugar, ethanol, and other useful substances, clarification of juices and wines, improving the nutritional quality of silage and green feed and the de-inking processes of waste papers (Viikari *et al.* 2001). The enzymes have been grouped based on the type of substrate hydrolyzed. Xylanases are categorized into three groups: β -xylosidase, exoxylanase and endoxylanase. Endoxylanase is the main enzyme responsible for the cleavage of the linkages within the xylan backbone (Belfaqui *et al.* 2002). Only a few microorganisms are capable of producing xylanase extracelullarly. Some findings indicated that bacteria (Gilbert and Hazlewood 1993; Sunna and Antranikian 1997), fungi (Tonukari *et al.* 2002; Kheng and Omar 2005), actinomycetes (Ball and McCarthy 1989; Begg *et al.* 2001), and yeast (Hrmova *et al.* 1984; Liu *et al.* 1999) were capable of producing xylanase. Xylanase-producing alkaliphilic bacteria can be used as bleaching agent for paper processing (Ruiz-Arribas *et al.* 1995).

Cultivation of xylanase-producing microorganisms in a liquid medium has been applied widely in producing the enzyme. There are many advantages in using a liquid medium, i.e. the type of component and composition of the medium are easy to adjust to obtain the optimum conditions for microbial growth; more efficient consumption of substrate easier in adjusting the microorganism growth rate; and the risk of contamination is less compared to using a solid medium. However, the cultivation in liquid medium required skills and expertise in operating a bioreactor for obtaining a high level of enzyme production. By shaking the liquid medium, it is expected that temperature, pH, oxygen, nutrient supply as well as other environmental factors are homogenous throughout the medium in the bioreactor.

The engineering on the processing of xylanase production is based on the information obtained through studying on the optimization process, the strategy on the studying optimum level of substrate, and then the modeling competency of the fermentation industry. All these cover the studies on the cultivation kinetics based on three rates i.e. the rates of biomass production, of substrate consumption and of enzyme production.

Production of xylanase from isolate bacteria capable of utilizing xylan for growth substrate as carbon source. In general, the agro-residues such as wheat bran, sugar cane bagasse, corn cob, paddy straw, rice husks, and cassava wastes were found to be more suitable like xylan (Saurabh *et al.* 2001; Richana *et al.* 2004). Saha (2002) reported structure

^{*}Present address and ^{*}Corresponding author, Indonesian Center for Agricultural Postharvest Research and Development, Pusat Penelitian dan Pengembangan Pertanian, Jalan Tentara Pelajar No 12, Bogor 16114, Indonesia; Phone: +62-251-7177064, Fax: +62-251-321762, E-mail: r1ch4n4@yahoo.co.id

of xylan in corb fiber is commercially available enzyme preparation.

This work was conducted to study the ability of *Bacillus pumilus* RXAIII-5 in producing xylanase using corn cobs as a substrate. Optimum conditions such as agitation, aeration, and the time course for bacterial cultivation are designed to favor bacterial growth. From the study it is expected that the parameters of cultivation kinetics will be obtained. There can be used as a basic strategy to optimize the amounts of substrate added. The study of rheology of the liquid medium in cultivation is also conducted for the purposes of scaling up of a bioreactor system.

MATERIALS AND METHODS

The experiment was carried out over the period December 2002 to September 2003. To determine the effect of pH and temperature on the growth of *B. pumilus* RXAIII-5, the temperature used were 25-50 °C (298-323 °K), pH 7-11 and agitation 100-160 rpm. Ten percent of inoculants were placed in 100 ml Erlenmeyer flask. Composition of growth medium was 0.125% (wt/vol) bactopectone, 0.05% (wt/vol) yeast extract, 3.04% (wt/vol) corn cob xylan, 0.08% (wt/vol) KH_2PO_4 , and 0.02% (wt/vol) $\text{MgSO}_4 \cdot 7\text{H}_2\text{O}$ (Richana *et al.* 2004).

Surface Response Method Box-Behnker experimental design using 3 variables was used for finding the optimum conditions for cultivation. Observations were carried out on the biomass production, xylanase activity, soluble protein content and substrate residue.

Cultivation Kinetics in Biostat B-21 Bioreactor.

Xylanase production using 1 liter of medium in a bioreactor was conducted at the optimum condition ($T = 35\text{ }^\circ\text{C}/308\text{ }^\circ\text{K}$, pH 7) obtained from the previous experiments. In this experiment the agitation rate was varied between 150, 200, and 250 rpm and the aeration was adjusted between 0.5 and 1.0 vvm (air volume per medium volume per minute). The pH of the medium was controlled by automatic addition of NaOH and HCl. Silicone was also added as an antifoaming agent. Sample of the culture were withdrawn at 0, 2, 4, 6, 8, 12, 16, 20, 24, 32, 36, 40, 44, and 48 h after the inoculation.

Observations were conducted on the cell biomass, enzyme activity and the soluble protein content. Cell biomass was separated by pelleting using centrifugation at 10,000 x g (centrifugal force). Soluble protein was determined by the method of Bradford (1976) using 100-800 ppm Bovine Serum Albumin (BSA) is standard. Absorbance of the reaction mixture was determined by spectrophotometrically at $\lambda = 600\text{ nm}$. Xylanase activity was determined by the ability of enzyme to hydrolyze xylan into invert sugar according to the method of Winterhalter and Liebl (1995). Analyses of invert sugar used the DNS (3,5-dinitro salysilic acid) method and spectrophotometry at $\lambda = 550\text{ nm}$. One unit of xylanase activity is the amount of enzyme which is able to convert xylan to produce 1 μmol invert sugar (or xylose) per min. (Kubata *et al.* 1992). A series of xylose standards was used.

Combination of agitation and aeration rates was used to calculate the parameter kinetics, in which a mathematical model was developed to explain the system dynamics on the

transformation of cell, substrate, and products during cultivation. In this experiment the Monod (1949) mathematical equation was used as follow:

$$\begin{aligned} dX/dt &= \mu X \text{ (cell biomass)} \\ \mu &= \mu_{\max} \cdot S/(K_s + S) \text{ or } 1/\mu = (K_s/\mu_{\max})(1/S) + 1/\mu_{\max} \\ dS/dt &= Y_{p/s} dS/dt \text{ (substrate)} \\ dP/dt &= Y_{p/x} dX/dt \text{ (xylanase activity)} \\ Y_{p/s} &= -dP/dS = \text{the efficiency of substrate consumption to} \\ &\quad \text{produce enzyme} \\ Y_{x/s} &= -dX/dS = \text{the efficiency of substrate consumption to} \\ &\quad \text{biomass} \\ Y_{p/x} &= dP/dX = \text{the efficiency of biomass to produce} \\ &\quad \text{enzyme, where} \end{aligned}$$

X: cell concentration (g. l^{-1}), S: substrate concentration (g. l^{-1}), P: product concentration, t: fermentation time (hour), U: specific growth rate (l.hour^{-1}), k_s : constant (g. l^{-1}), μ_{\max} : specific maximum of growth rate (l. jam^{-1}). Parameter kinetics consisting of μ_{\max} , $Y_{p/s}$, $Y_{x/s}$, $Y_{p/x}$ were determined based on experimental data using a nonlinear regression technique (Scragg 1991).

The Rheology of the Liquid Culture. The density of the liquid culture was determined using picnometer (weight per volume), and its viscosity using a Brookfield Viscometer at 6, 12, 30, 60 rpm having a spindle number of 2. Data of viscosity, shear rate and shear strength were recorded. From these, the consistency index (k) and liquid index (n) was calculated. The Rheynolds number (NRe) was determined as follows:

$$\text{NRe} = (N_1 D_1^2 \bar{n}) / \dot{\gamma}_a$$

N=shaking speed, D=diameter of impeller, ρ =density, $\dot{\gamma}_a$ =viscosity, n liquid index.

These data, combined with the data obtained from the run of Biostat-21 bioreactor, enabled the power needed to run the impeller to be calculated. Power consumption for the impeller was then calculated using the equation presented as follows:

$$P = (\bar{n} N^3 D_1^5 N_p) / g_c$$

P= power consumption, N_p = power number, g_c = gravitation = 9.81 g cm/g sec^2 .

Bioreactor scaling up was calculated based on the power consumption per unit of volume.

RESULT

Optimum Conditions for the Growth of *Bacillus pumilus* RXAIII-5. This work was designed to study the effect of temperature, pH and the rate of agitation in an effort to obtain optimum conditions for the growth of the bacterium. The quadratic-response-curve model was used in the analyses of variance (Table 1). It was found that there was no significant effect of temperature, pH and the rate of agitation on soluble protein content.

Analyses of variance of xylanase activity indicates that the mathematical model used fits very significantly. The coefficient of determination (R^2) is 0.962 which means there is less than 4% of variance which does not fit the model.

Table1 Analysis of variance for soluble protein, xylanase activity and specific activity of liquid culture of *B. pumilus* RXAIII-5

Source of variance	Protein xylanase	Activity ^a	Specific activity ^b
Regression Model	ns	**	**
Linear	ns	**	**
Quadratic	ns	**	**
R ²	0.778	0.96	0.97
Mean	0.433	105.92	245.90
X1 = Temperature	ns	ns	ns
X2 = pH	ns	**	**
X3 = rpm	ns	ns	*
(X1)(X2)	ns	ns	ns
(X1)(X3)	ns	ns	ns
(X2)(X3)	ns	*	*
(X1)(X2)(X3)	ns	ns	ns

*Significantly different, **Very significantly different, ns = not significantly different, ^aXylanase activity: Unit/ml, ^bSpecific activity: Unit xylanase/mg protein.

Variation of temperature, pH and shaking speed is greatly affected xylanase activity. Interaction effects upon xylanase activity is shown only by the two parameter of pH and shaking speed. Application of the quadratic response model shows an empirical relationship between xylanase activity and the test variable and unit code with a regression equation as follows:

$$Y = 1010.958 - 22.639 X1 - 365.38 X2 + 22.128 X3 + 0.178 X1 * X1 + 0.872 X2 * X1 + 21.735 X2 * X2 - 0.0108 X3 * X1 - 0.872 X3 * X2 - 0.0536 X3 * X3,$$

where X1: temperature, X2: pH, and X3: rpm.

Maximum xylanase activity is 297.13 U.ml⁻¹ at pH 7, temperature 35 °C, and an agitation rate of 140 rpm (Fig 1). Minimum xylanase activity is 42.71 U.ml⁻¹ at pH 9.9, 42 °C, and 120.89 rpm for pH, temperature and agitation, respectively. These data indicate the minimum conditions in which *B. pumilus* RXAIII-5 can survive and produce xylanase.

The results of the analyses of variance on specific activity are similar to those of xylanase activity, i.e. the presumed model fits very well. There is a highly significantly effect of pH on xylanase activity and specific activity for both the linear as well as the quadratic models. However, the effect of the interaction between pH and agitation rate on both xylanase activity and specific activity is small. Application of quadratic response model shows an empirical relationship between xylanase activity and test variable and unit code with its regression equation as follows:

$$Y = 2217.857 - 37.77 X1 - 846.99 X2 + 48.03 X3 + 0.399 X1 * X1 + 0.74 X2 * X1 + 52.61 X2 * X2 - 0.05 X3 * X1 - 1.84 X3 * X2 - 0.12 X3 * X3,$$

where X1: temperature, X2: pH, X3: rpm.

Maximum specific activity is 650.11 U.g⁻¹ at pH 7 and 35.2 °C calculated from the quadratic mathematical model (Fig 1).

The Optimization of Agitation and Aeration in a 2 l Bioreactor. The work on the optimization of agitation and aeration of the liquid medium was conducted in a 2 l bioreactor. The aeration rates were 0.5 and 1.0 vvm and the

agitation rates were 200, 150, and 100 rpm. Sample were taken to estimate on the dry weight of the cell mass, protein content and xylanase activity.

Dry Weight of Cell. Fig 2. indicates that the adaptation phase for the bacterial growth lasted for 6 h for the culture in all treatments. The same goes for the exponential phase, the phase of the culture of all treatments lasted for 30 min. *The highest* bacterial growth (2.802 g l⁻¹) of liquid culture was obtained at 200 rpm and 1 vvm of agitation and aeration rates, respectively. This was followed (2.523 g l⁻¹) by 150 rpm and 0.5 vvm of agitation and aeration rates respectively. Results mentioned above fit the theory that the oxygen consumption rate by aerobic microorganisms is high enough, but insufficient oxygen supply will decrease yield.

Soluble Protein. Total soluble protein content is used as one of the parameters to measure enzyme production. The

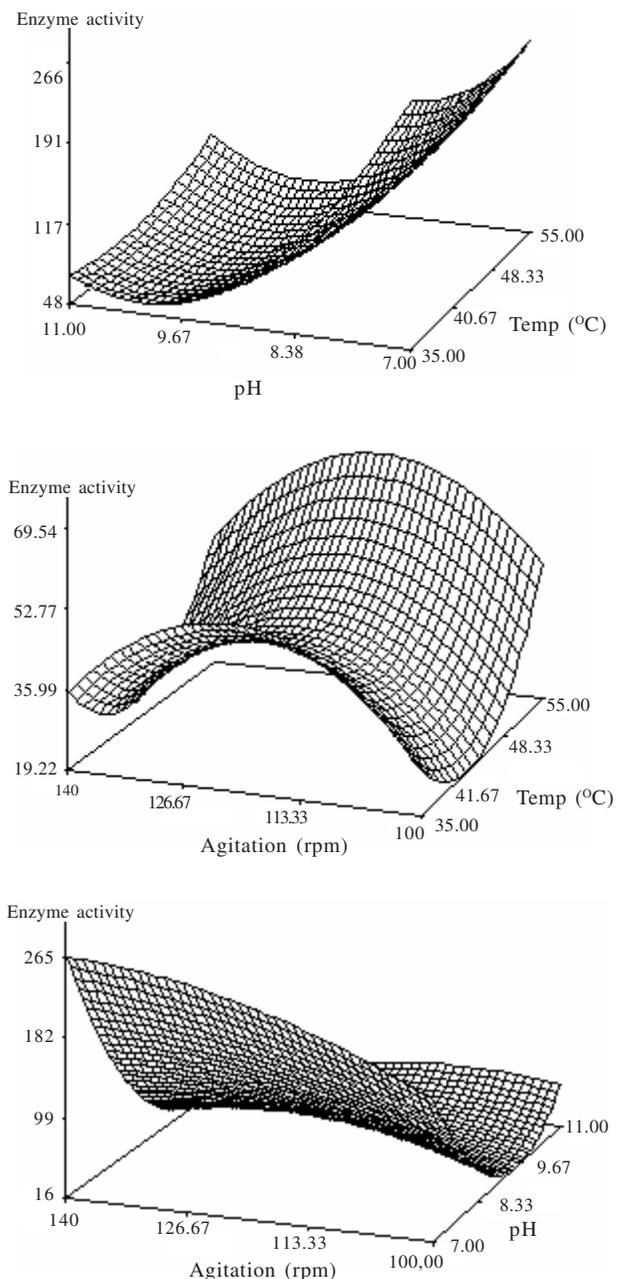


Fig 1 Interaction effect among treatments (temperature, pH, agitation) on the xylanase activity of *B. pumilus* RXAIII-5.

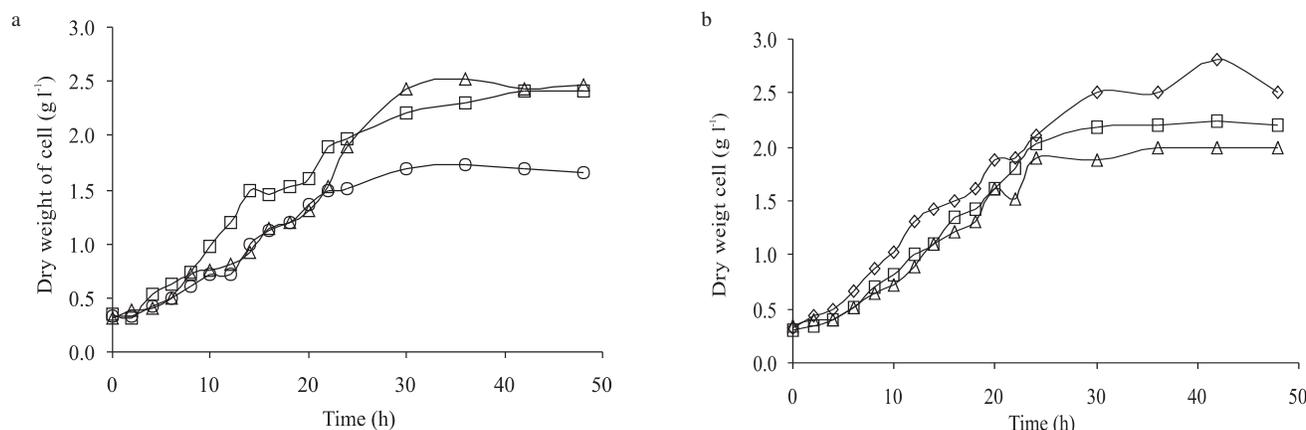


Fig 2 Several growth curves of *B. pumilus* RXAIII-5 with various agitation rates and two aeration rates (a: 0.5 vvm and b: 1 vvm). Cell dry weight is plotted against time. (—□—) 200 rpm, (—△—) 150 rpm, (—○—) 100 rpm.

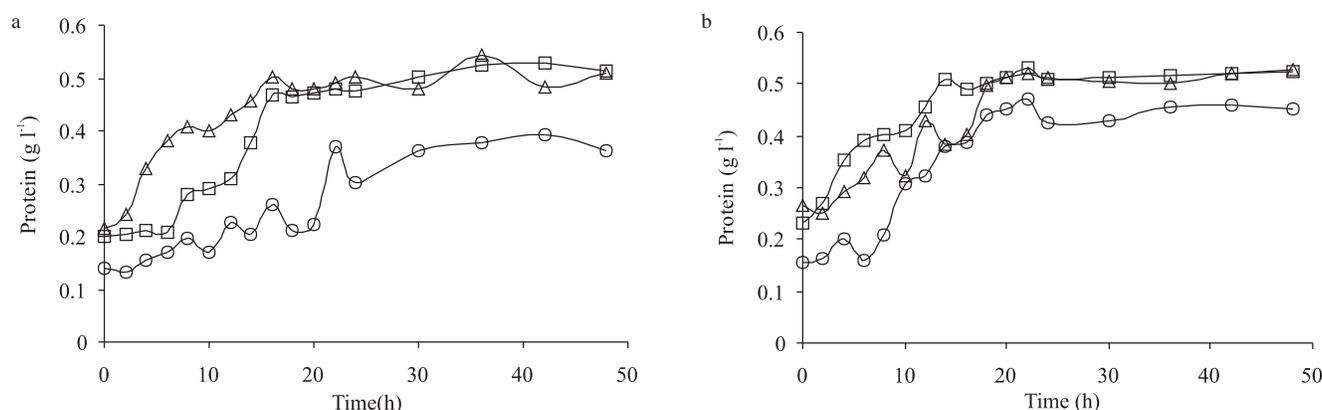


Fig 3 Curves of total soluble protein at aeration rates of a: 1.0 vvm and b: 0.5 vvm using three agitation rates. (—□—) 200 rpm, (—△—) 150 rpm, (—○—) 100 rpm.

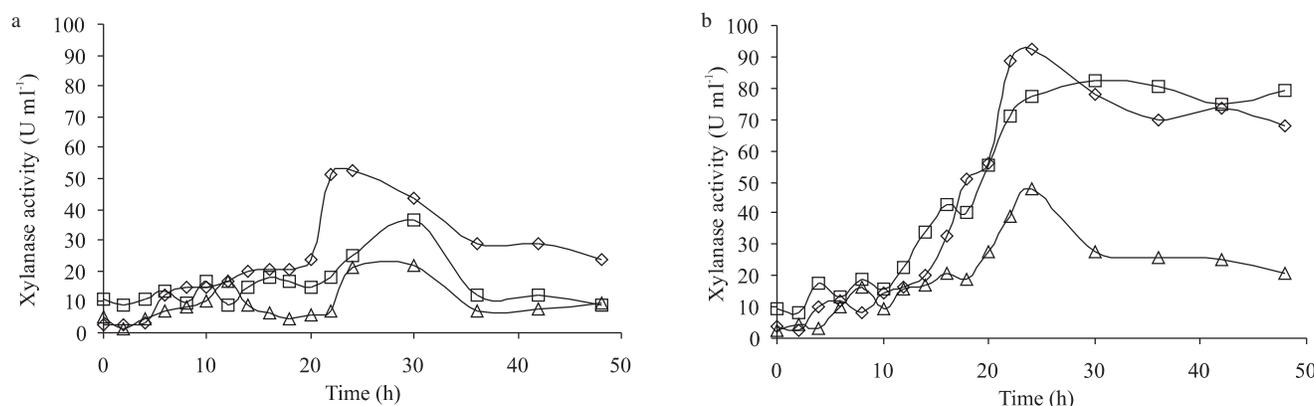


Fig 4 Curves of xylanase activity at aeration rates of a: 1.0 vvm and b: 0.5 vvm using three agitation rates. (—◇—) Akt (200 rpm), (—□—) Akt (150 rpm), (—△—) Akt (100 rpm).

data obtained showed a similar increased pattern of total soluble protein content, cell dry weight and xylanase activity. The highest total soluble protein content was recorded using agitation rate of 150 and aeration rates at 0.5 and 1.0 vvm (Fig 3).

Xylanase Activity. Xylanase activity of *B. pumilus* RXAIII-5 in the liquid culture was not detectable before 10 h after inoculation. In almost all treatments, the optimum xylanase activity was at 24 to 30 h after inoculation, and from then on the xylanase activity decreased. The highest xylanase activity was produced at an aeration rate of 0.5 and 1.0 vvm and at agitation rate of 200 rpm compared to those of the




other combinations treatments (Fig 4). The highest xylanase activity, 92.52 U ml⁻¹, was detected at 24 h after inoculation with an agitation rate of 200 rpm and an aeration rate of 1 vvm. The smallest xylanase activity was recorded at 100 rpm and 0.5 vvm of agitation and aeration rates, respectively. This was due to the lower aeration rate resulting in a lower oxygen supply which slowed metabolism there by producing less enzymes, including xylanase.

Cultivation Kinetics of *B. pumilus* RXAIII-5. The data on the effect of aeration and agitation was processed similarly to the above using the Monod equation (Monod

Table 2 Value for $Y_{p/s}$, $Y_{p/x}$, and $Y_{x/s}$ of liquid culture of *B. pumilus* RXAIII-5 at various aeration and agitation rates

Aeration (vvm)	Agitation (rpm)	Specific growth (h^{-1})	$Y_{x/s}$ (g g^{-1} substrate)	$Y_{p/s}$ (U g^{-1} substrate)	$Y_{p/x}$ (U g^{-1} biomass)
0.5	200	0.078 ± 0.003	1.057 ± 0.123	26.295 ± 2.643	25.272 ± 2.370
0.5	150	0.082 ± 0.013	0.757 ± 0.055	12.535 ± 2.473	9.176 ± 1.812
0.5	100	0.067 ± 0.012	0.757 ± 0.082	9.665 ± 1.186	11.755 ± 1.771
1	200	0.081 ± 0.002	1.178 ± 0.132	50.744 ± 7.706	43.906 ± 7.127
1	150	0.081 ± 0.001	0.956 ± 0.096	39.124 ± 6.799	42.075 ± 7.490
1	100	0.072 ± 0.007	0.962 ± 0.093	22.090 ± 3.674	20.088 ± 3.307

\pm : standard deviasi, $Y_{x/s}$: The efficiency of substrate consumption for the cell biomass production, $Y_{p/s}$: The efficiency of substrate consumption for the enzyme production, $Y_{p/x}$: The efficiency of the enzyme production by cell biomass.

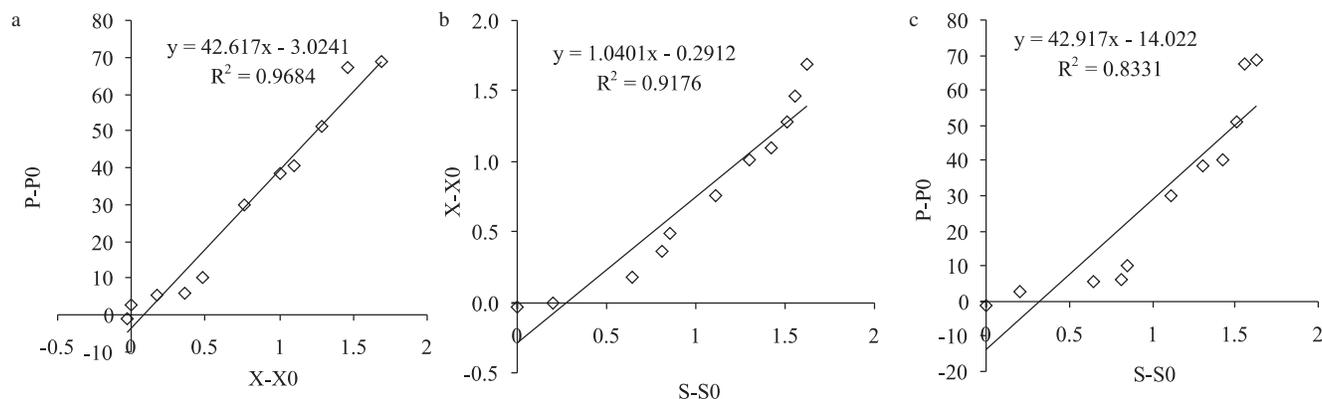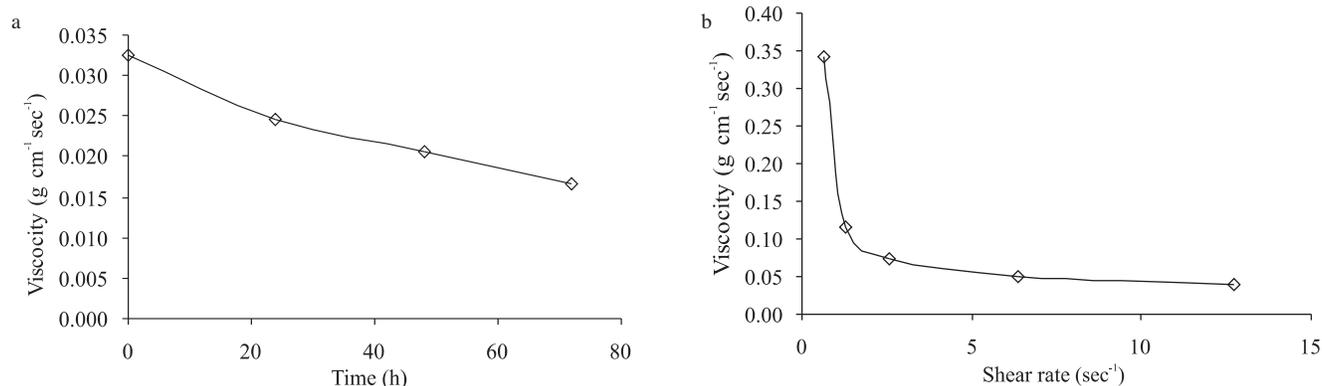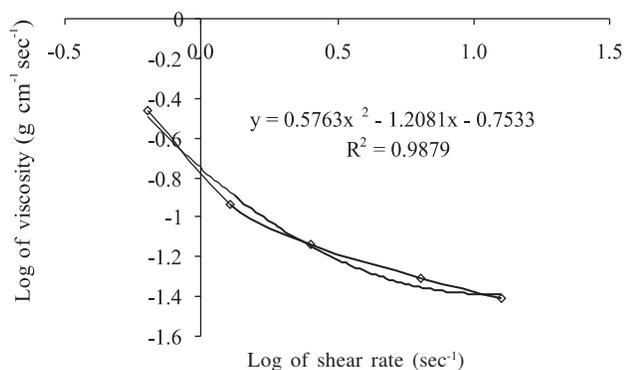Fig 5 Linear regression of $Y_{p/s}$ (a), $Y_{x/s}$ (b), and $Y_{p/x}$ (c) for liquid culture of *B. pumilus* RXAIII-5.Fig 6 Rheology of liquid culture of *B. pumilus* RXAIII-5 (A: relationship of viscosity and time of fermentation, B: relationship of viscosity and shear rate).Fig 7 Plot of logarithmic of viscosity and logarithmic of shear rate of a liquid culture of *B. pumilus* RXAIII-5.

1949) as described above (Fig 5). Calculated results are shown in Table 2.

Rheology of the Cultivation Liquid. The data obtained shows that the viscosity of the medium decreases over the course for culturing the bacterium (Fig 6). This would

influence the flow performance of the medium in a bioreactor. Flow pattern changes of the liquid would alter mass and heat transfer and can cause inappropriate oxygen distribution in the bioreactor medium.

Fig 6b shows that the liquid culture behaves as a non-Newtonian fluid, its viscosity changes with the change of shear rate. As the liquid is non-Newtonian, then it is necessary to give special attention to the consistency index (k) and the index (n) of liquid behavior to determine the properties of the liquid culture. These linear regression relationship between the log of sheared rate and the log of viscosity show a slope of $n-1$, with an intercept of $\text{antilog } k$ (Fig 7).

DISCUSSION

In addition to growth medium, bacterial cultivation required particular environmental conditions for supporting their good growth. The environmental factors include

physical factors such as temperature and agitation, as well as chemical environment which can influence the physical properties of cells. Cell membranes are greatly affected by temperature, while their permeability depends on the content and type of lipid in the membrane. A temperature increase of 5-10 °C over the optimum temperature may cause lysis and kill the cells of microorganisms.

The total content of soluble protein begins to increase at the start of the exponential growth phase. High total enzymes (xylanase activity) were also produced during this phase. This phenomenon shows that xylanase is actually a primary metabolic product that is associated with cell growth. The enzyme is used for cell growth as well as for hydrolyzing xylanase as its substrate.

The results also indicate that even if the growth conditions of a bacterial isolate is made basic (high pH) from the start, the experimental results indicate that it does not automatically require a high pH for optimum growth. *Bacillus pumilus* RXAIII-5 still survives at pH 9.9 while the optimum growth is at neutral pH (pH 7). A similar phenomenon was reported by Yang *et al.* (1995). In his experiments with *Bacillus* sp., which were able to survive at pH 11.5, resulted in xylanase activity of 49 U.ml⁻¹ with an optimum of pH 7. This result agrees with funding of Rawashdeh *et al.* (2005) who reported a xylanase from *Streptomyces* sp (strain lb 24D) with a pH optimum of pH 6-7.

To scale-up xylanase production it is necessary to conduct a study on the mathematical model for cultivation kinetics. This model was obtained by entering data of the kinetics parameters into the Monod equation (Monod 1949), and then executing it to give a validation. Four parameters i.e. specific-growth, biomass production, substrate consumption, and enzyme production (xylanase activity) rates were studied in the cultivation kinetics. The resulting data are useful for determining the optimum conditions, i.e. the strategy for obtaining optimum substrate additions and studying mathematical models for the fermentation industry.

The specific growth rate (μ) was not constant as it depends on the physical and chemical environment. The specific growth rate is a slope obtained from a linear relationship between time of cultivation and natural logarithm (ln) of dried cell weight of a bacterial culture. In this experiment 6 treatments resulted in specific growth rates (μ) of 0.067-0.082 an hour (Table 2). The highest specific growth rate was obtained at 150 rpm and 0.5 vvm for agitation and aeration rates, respectively, and the minimum specific growth rate was obtained at 100 rpm and 0.5 vvm for the agitation and aeration rates. Lower aeration reduced the specific growth rate. At an aeration rate of 0.5 and 1.0 vvm, with agitation rate of 100 rpm, the specific growth rates were 0.067 and 0.072 an hour, respectively.

Microorganism growth and xylanase activity is closely related to substrate consumption. This phenomenon was shown by the equilibrium of substrate consumption, microorganism growth rate and xylanase activity (enzyme production). The efficiency of each of the three parameters was shown as the yield i.e. $Y_{p/x}$ defined as the efficiency of substrate consumption for the enzyme production, $Y_{x/s}$ as

the efficiency of substrate consumption for the cell biomass production, and $Y_{p/x}$ as the efficiency of the enzyme production by cell biomass. The value of the three parameters was calculated by the Monod equation (Monod 1949), and the result are presented in Fig 5.

The highest efficiency for substrate consumption for cell biomass production ($Y_{x/s}$) was 1.18 g g⁻¹ at an agitation rate of 200 rpm and an aeration rate of 1.0 vvm (Table 2). The increase in the efficiency of the substrate consumption ($Y_{x/s}$) and also will be increases the efficiency of enzyme production by cell biomass ($Y_{p/x}$). The enzyme production was greatly affected by cell biomass production.

Biomass production was directly related to substrate consumption. In these experiments, the highest biomass was achieved at levels of aeration with agitation rates of 1.0 vvm and 200 rpm, respectively. This indicates that increasing the aeration and agitation rates will increase the availability and facilitate the distribution of oxygen supply in the bioreactor. The lag phase could be shortened with a faster rate of aeration.

The oxygen consumption by microorganisms was related to the aeration and agitation of the cultivation process. Low levels of oxygen supply would reduce enzyme, antibiotic, and organic acid production by the microorganism. Based on the data on the cultivation kinetics of *B. pumilus* RXAIII-5 in liquid culture, an optimum condition was selected to obtain the highest efficiency of xylanase activity using biomass as a parameter. An optimum condition was obtained at the aeration and agitation rates of 1.0 vvm and 200 rpm, respectively with a recorded $Y_{x/s}$ 1.18 g g⁻¹ substrate, $Y_{p/s}$ 50.74 U g⁻¹ and $Y_{p/x}$ 43.91 U g⁻¹ biomass.

Our study on the flow behavioural and properties of liquid culture medium (rheology) are very useful for bioreactor design. The properties of the fluid flow of a liquid culture medium affected the homogeneity of the liquid culture components. Fluid viscosity and flow properties affected significantly the transfer of components entering and leaving the cell.

Fermentation broth was found to behave as shear thickening fluid ($n=0.3212$), and consistent index ($k = 0.179$ g cm⁻¹ second⁻¹). Liquid culture is a non-Newtonian and mathematical calculation giving $n=0.32$ and $k = 0.18$ g cm⁻¹ second⁻¹. This means that the $k > 0$ and $0 < n < 1$ which indicates the liquid has pseudoplastic properties. This result differ from funding of Mora-Alvarez (1999) who reported the rheological characterization of fermentation broth from xylanase production by *Trichoderma longibrachiatum* broths with n ranged from 1.14 to 2.15.

This experiment also means that the viscosity decrease is due to an increase in the shear rate. Increasing the speed of shaking would reduce the liquid viscosity. Thus, the flow of liquid around the impeller is much more rapid than that at the surface as well as around the wall of the bioreactor. Therefore, the rheology of the liquid medium influences the energy required for the operation of a bioreactor.

To agitate a non-Newtonian liquid requires higher energy as compared with that of a Newtonian liquid. The calculated Rheynold number (NRe) of the liquid was 6.9×10^3 i.e. larger than 10^3 . The value of NRe indicates that the liquid has

turbulent properties (Doran 1995). The power value (N_p) was determined by fitting the N_{Re} value on the curve of power function versus N_{Re} . For a six-blade-turbine impeller the N_p value obtained was 5.0. The energy requirement to run the impeller with 0.228 HP (horse power) for aerating the system per unit volume was 0.2665 HP m^{-3} . The value is then incorporated into the calculation for scaling up the bioreactor. Due to the complexity of the properties of the liquid medium, the bioreactor design for bacterial culture is very critical. Once the course of the reaction, the rheology of the liquid medium changed from pseudoplastic to Newtonian due to the decomposition of xylan (polymer) to xylose (monomer).

REFERENCES

- Ball AS, McCarthy AJ. 1989. Production and properties of xylanases from actinomycetes. *J Appl Bacteriol* 66:439-444.
- Beg QK, Kapoor M, Mahajan L, Hoondal GS. 2001. Microbial xylanases and their industrial applications; a review. *J Appl Microbiol Biotechnol* 56:326-338.
- Belfaoui N, Jaspers C, Kurzatkowski W, Penninckx MJ. 2002. Properties of *Streptomyces* sp. Endoxylanases in relation to their applicability in kraft pulp bleaching. *World J Microbiol Biotechnol* 18:699-705.
- Bradford MM. 1976. A rapid and sensitive methods for quantitative proteins utilizing the principles of protein dye binding. *Anal Biochem* 72:248-354.
- Doran PM. 1995. Bioprocess Engineering Principles. Academic Pr Limited. London. p 51-103.
- Gilbert HJ, Hazlewood GP. 1993. Bacterial cellulase and xylanases. *J Gen Microbiol* 139:187-194.
- Hrmova M, Biely P, Vrsanska M, Petrakova E. 1984. Induction of cellulose and xylanase-degrading enzyme complex in the yeast of *Trichosporon cutaneum*. *J Arch Microbiol* 138:371-376.
- Kheng PP, Omar IC. 2005. Xylanase production by a local isolate, *Aspergillus niger* USM AI 1 via solid state fermentation using palm kernel cake (PKC) as substrate. *Songklanakar. J Sci Technol* 27:325-336.
- Kubata KB, Horitsu HK, Kawai, Takamizawa K, Suzuki T. 1992. Xylanase I of *Aeromonas caviae* ME-1 Isolated from the intestine of a herbivorous insect (*Samia cyrithia pryeri*). *J Biosci Biotech Biochem* 56:1463-1464.
- Liu W, Lu Y, Ma G. 1999. Induction and glucose repression of endo- β -xylanase in the yeast *Trichosporon cutaneum* SL409. *Process Biochem* 34:67-72.
- Monod J. 1949. The Growth of bacterial cultures. *Ann Rev Microbiol* 3:371-374.
- Rawashdeh R, Saadoun I, Mahasneh A. 2005. Effect of cultural condition on xylanase production by *Streptomyces* sp. (strain lb 24D) and its potential to utilize tomato pomace. *African J Biotechnol* 4:251-255.
- Richana N, Lestina P, Irawadi TT. 2004. Karakterisasi lignoselulosa: xilan dari limbah tanaman pangan dan pemanfaatannya untuk pertumbuhan bakteri RXA III-5 penghasil xilanase. *J Penelitian Pertanian* 23:171-176.
- Ruiz-Arribas A, Fernandez-Abalos JM, Sanches P, Gardu AL, Santamaria RI. 1995. Over production, purification and biochemical characterization of xylanase I (xys 1) from *Streptomyces halstedii*. *JM8. Appl Environ Microbiol* 61:2414-2419.
- Saha BC. 2002. Production, purification, and properties of xylanase from a newly isolated *Fusarium proliferatum*. *Process Biochem* 37:1279-1284.
- Saurabh G, Kuhad RC, Bharat B, Hoondal GS. 2001. Improved xylanase production from a haloalkalophilic *Staphylococcus* sp. SG-13 using inexpensive agricultural residues. *World J Microbiol Biotechnol* 17:5-8.
- Sunna A, Antranikian G. 1997. Xylanolytic enzyme from fungi and bacteria. *Crit Rev Biotechnol* 17:39-67.
- Tonukari NJ, Scott-Craig JS, Walt JD. 2002. Influence of carbon source on the expression of *Cochliobolus carbonum* xylan-degrading enzyme genes. *African J Biotechnol* 1:64-66.
- Viikari L, Kantelinen A, Sundqvist J, Linko M. 2001. Xylanases, in bleaching: from an idea to the industry. *FEMS Microbiol Rev* 13:335-350.
- Winterhalter C, Liebl W. 1995. Two extremely thermostable xylanase of the hyperthermophilic bacterium *Thermotoga maritima* MSBB. *App Environ Microbiol* 61:1810-1815.
- Yang VW, Zhuang Z, Elegir G, Jeffries TW. 1995. Alkaline-active xylanase produced by an alkaliphilic *Bacillus* sp. (VI-4) isolated from kraft pulp. *J Ind Microbiol* 15:434-441.